

SECURICHARGE:EV *SUPERFAST*

FREE-TO-USE

Type 2, Mode 3 Charging Socket(s)
11kW or 22kW

ROLEC

EV Charging

MANUFACTURED IN THE UK



The SECURICHARGE:EV *SUPERFAST* is a wall mounted heavy duty, hard wearing EV charging unit which has been specifically designed and manufactured for exposed commercial and public facing locations.

Available in both 1way or 2way versions, this wall unit's Type 2 (IEC62196) Mode 3 superfast 3 phase sockets provide charging in 11kW or 22kW speeds.

Unit shown: SECURICHARGE:EV *SUPERFAST*
2way Socket (Type 2) Charging Unit

PRODUCT FEATURES

- Mode 3 (IEC 61851-1) fast charging
- Available in 1way & 2way versions
- 11kW (16A) & 22kW (32A) charging speeds
- Type 2 (IEC 62196) 3 phase charging socket(s) c/w security hatchlock(s)
- Key switch control as standard
- Built-in AC overload & fault current protection
- Built-in DC sensitive protection
- Built-in LED charging status indicator socket halo(s)
- Easy to install & maintain
- IP rated
- UV stabilised
- Corrosion resistant
- Fire retardant



Free
To Use



Superfast
3 Phase Charging



Branding & Colour
Options Available



Secure
& Durable






IP Rated &
UV Stabilised



Key Switch
Control


SPECIFICATIONS

Product Code	EVSC0030	EVSC0040	EVSC0200	EVSC0210
Charging Socket(s)	1x Type 2 (IEC 62196) 		2x Type 2 (IEC 62196) 	
Rated Output	11kW	22kW	11kW	22kW
Rated Current	16A	32A	16A	32A
Charge Protocol	Mode 3			
Input Voltage	400V AC/50Hz (3 Phase)			
AC Overload Protection	1x 20A	1x 40A	2x 20A	2x 40A
AC Fault Protection	30mA			
DC Fault Protection	6mA			
Cable Terminals	5x 50mm			
Standby Consumption	Approx 0.4kWh per day		Approx 0.5kWh per day	
Certifications & Compliances	EV Charging Compliance – EN 61851-1:2001, EN 61851-21:2002, EN 61851-22:2002 Wiring Regulations – BS 7671 EMC Compliance – EN 61000-6-3:2007, EN 61000-6-2:2005 Safety Compliance (LVD) – 2014/35/EU Environmental Protection – Enclosure IP54, Socket IP54 (BS EN 60529:1992+A2:2013)			
				
Dimensions	200mm x 500mm x 125mm (W x H x D)		320mm x 575mm x 125mm (W x H x D)	
Unit Material	Bodywork manufactured in heavy duty 1.5mm steel & applied with 45 – 55 microns of zinc primer			
Unit Finish	Corrosive resistant, textured Polyester powder coating			
Operating Temperature	-30°C to +50°C			
Standard Body Colour	Black (Other colours available upon request)			
Standard Fascia Colour	Black (Other colours available upon request)			

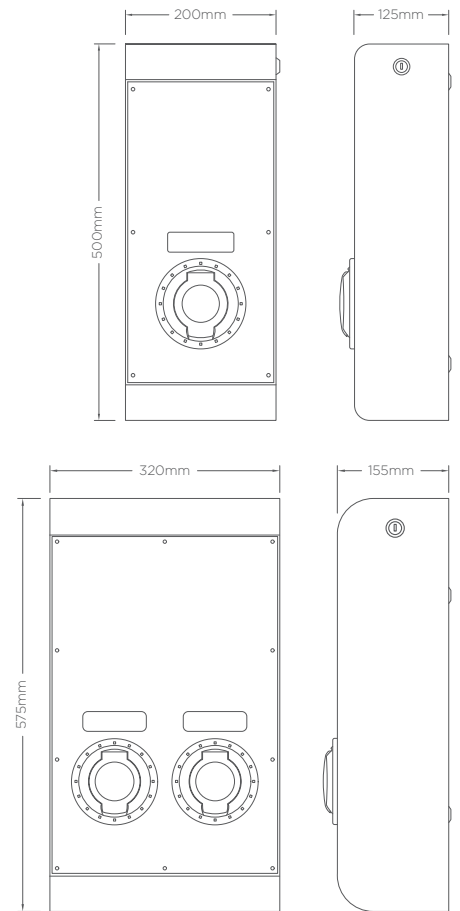

OPTIONS & ACCESSORIES

- Built-in class 1 MID compliant kWh meter
- Built-in time clock providing charge time management
- Corporate branding (colours, logo badge, etc.)
- Charge point signage
- 3 phase EV charging cables (Type 2 to Type 2)



Images are for marketing purposes only and are not contractual © 2020



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

 @RolecEV
 /Rolec-Services
www.rolecserv.com

EVSC3D-V03-R1 SecuriCharge EV FTU Superfast - Data Sheet