



HEIDELBERGCEMENT Group

Farmhouse Brown  
Sandfaced

# Farmhouse Brown Sandfaced

**Manufactured to BS EN 771-1**

**Brick type**

Category II, HD, Clay Masonry Unit

**Standard work size**

215 x 102.5 x 65mm

**Dimensional tolerances**

Tolerance category: T2

Range category: R1

**Compressive strength**

≥ 75N/mm<sup>2</sup>

**Water absorption**

≤ 7%

**Durability**

F2

**Active soluble salts content**

S2

**Configuration**

Vertically perforated 23-28% voids

**Dry weight per brick**

2.50kg

**Pack size**

504


**Factory**

Wilnecote

**DISCLAIMER:**

The reproduction of colours and textures is only as accurate as the printing process will allow. Photographic samples should be used when shortlisting products but we advise that an actual sample should be seen before ordering.

This panel is printed on paper made using ecf from fibres obtained from a sustainable timber source.

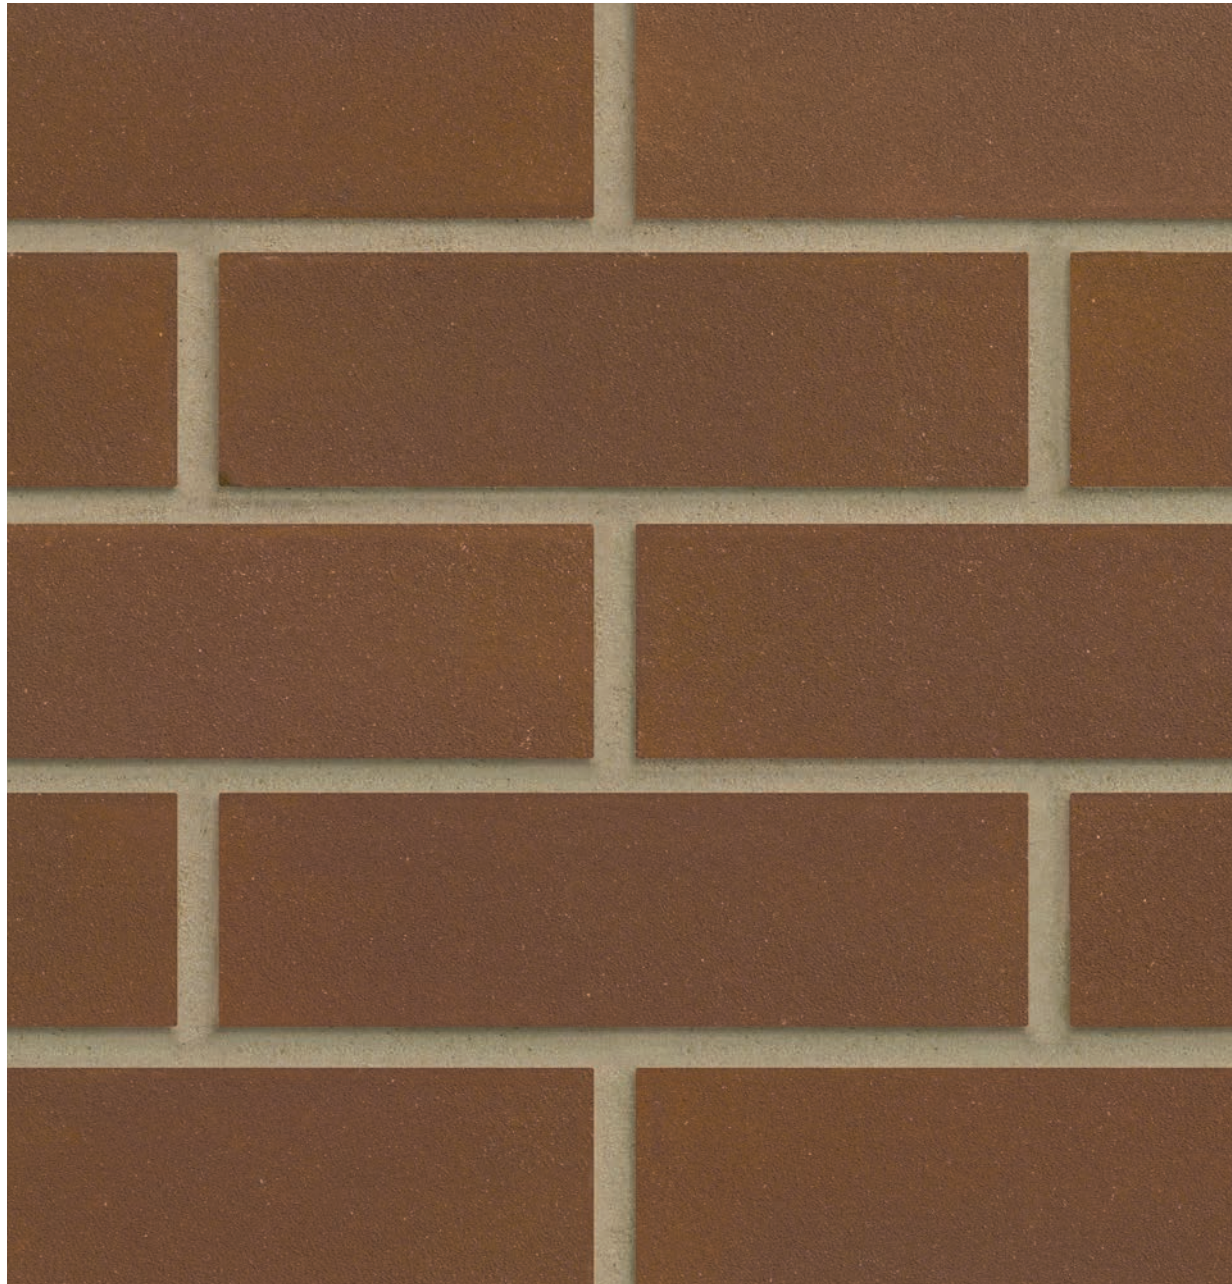

Hanson Building Products  
222 Peterborough Road  
Whittlesey  
Cambridgeshire  
PE7 1PD

**Sales: 0330 123 1017**  
**Technical: 0330 123 1018**  
**Fax: 01733 206040**

[www.hanson.com/uk](http://www.hanson.com/uk)  
[twitter@Hanson\\_UK](https://twitter.com/Hanson_UK)